


PIPELINE MILKING

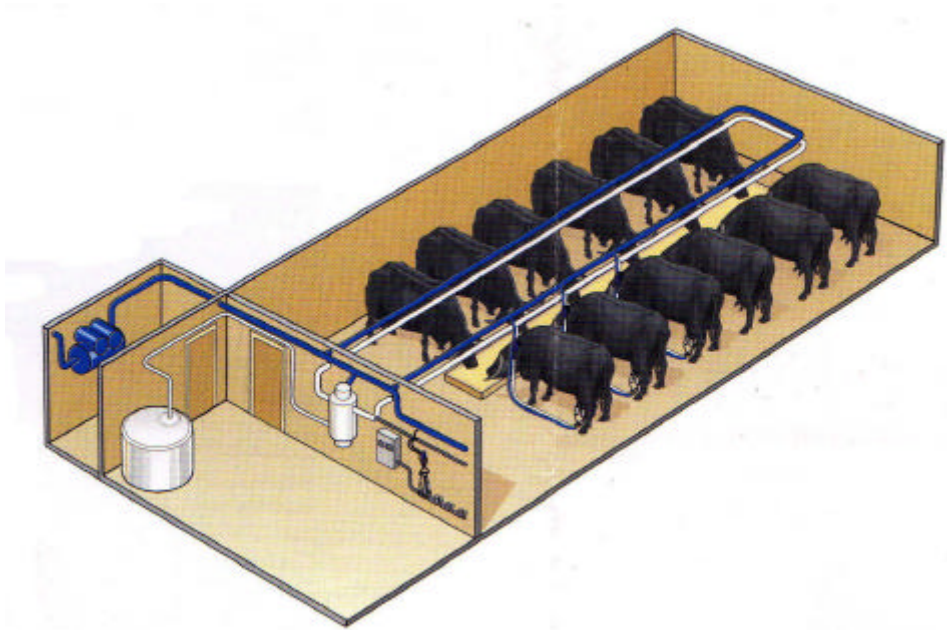

- ❖ Pipeline Milking is suitable for herds of 25 -200 COWS.
- ❖ One Unit can milk ten cows per hour and one milker can handle four units at a time.
- ❖ When the Milk Cluster is connected to the milkline and attached to the udder, vacuum is applied under the teats, whereby cyclic pulsation is created and milk is extracted from the teats into the claws.
- ❖ From the claw, the extracted milk is transported by vacuum into the milkline and drawn into the receiver.
- ❖ From the receiver the milk can be directly pumped through a filter directly into a bulk cooler or churns.

Cleaning of the system is facilitated and can be automatic with the cleaning unit.

Engineered & Exported by:

ENCON Consulting Engineers

M-28, 7th Floor, Marigold,

Krishnakeval Township,

Kondhwa Khurd,

Pune 411048-INDIA.

Tel/Fax: +91 20 26831210

Cell Phone: +91 94 22 00 2758

Email: encon@vsnl.com / enconindia@hotmail.com